
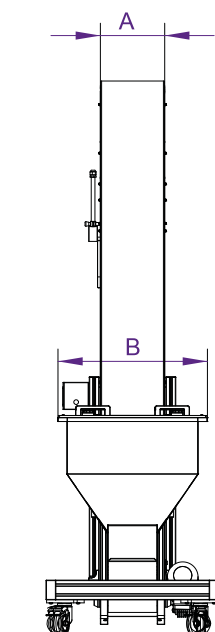


# castle stair elevator

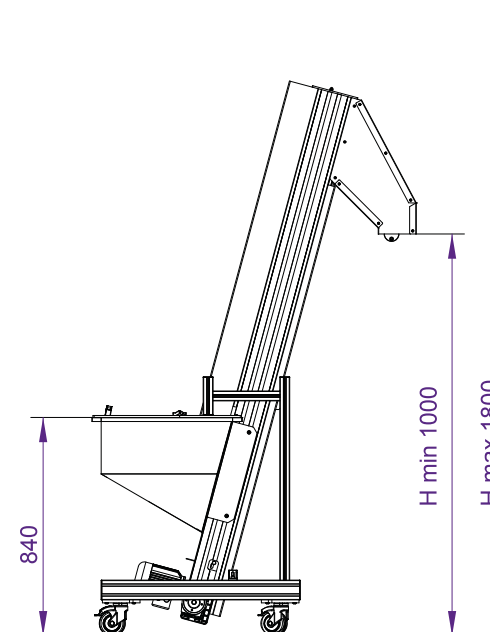

## CHARACTERISTICS


- Suitable for the collection of products from a hopper and their elevation
- Appropriate for plastic cap closures transport
- As an option: FDA version to convey specific components

## TECHNICAL FEATURES

- Structure made of aluminium anodised profile
- With side panels height 40 mm
- PU belt with slats h 30 pitch 150 mm, vulcanised belt joint. Temperature resistance from -10°C to + 90°C
- Elevator complete with loading hopper
- Slope canal of the elevator complete with polycarbonate covering
- Elevator mounted on anti-vibrating feet or wheels
- Transmission group composed of: three-phase motor, coupled to worm reduction unit with lubrication for life
- Fixed standard speed 12 m/min
- Equipped with Start/Stop motor cut-out
- Standard motor supply voltage 400V/50 Hz

## STAIR 600 DIMENSIONS

DIMENSION	A (mm)	B (mm)	HOPPER CAPACITY	H min (mm)	H max (mm)
STAIR 600	200	600	80 lt	1000	1800

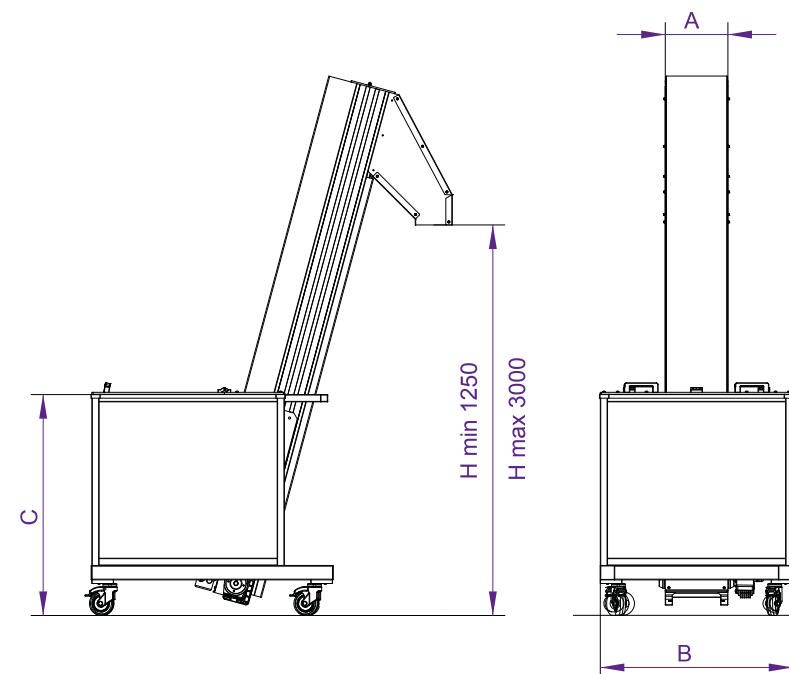

## CHARACTERISTICS

- Suitable for the collection of products from a hopper and their elevation
- Appropriate for plastic cap closures transport
- As an option: FDA version to convey specific components

## TECHNICAL FEATURES

- Structure made of aluminium anodised profile
- With side panels height 40 mm
- PU belt with slats h 30 pitch 150 mm, vulcanised belt joint. Temperature resistance from -10°C to + 90°C
- Elevator complete with loading hopper
- Slope canal of the elevator complete with polycarbonate covering
- Elevator mounted on anti-vibrating feet or wheels
- Transmission group composed of: three-phase motor, coupled to worm reduction unit with lubrication for life
- Fixed standard speed 12 m/min
- Equipped with Start/Stop motor cut-out
- Standard motor supply voltage 400V/50 Hz

## STAIR 800 - 900 - 1000 DIMENSIONS

DIMENSION	A (mm)	B (mm)	C (mm)	HOPPER CAPACITY	H min (mm)	H max (mm)
STAIR 800	200	800	930	185 lt	1250	3000
STAIR 900	300	800	930	185 lt	1250	3000
STAIR 1000	300	1000	1130	410 lt	1250	3000