rook conveyor

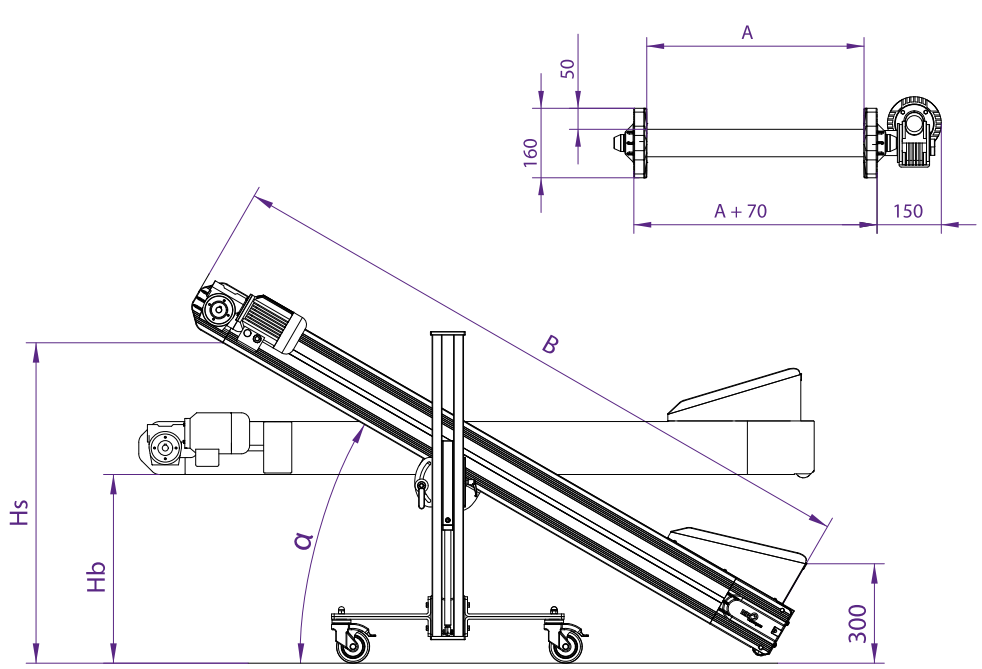

CHARACTERISTICS

- Conveyor adjustable in inclination
- Suited to collect products and convey them at an adjustable height, thanks to its central support

TECHNICAL FEATURES

- Structure made of aluminium anodised profile height 160 mm
- With side panel not removable height 50 mm
- Smooth PU belt, slats h 30 mm pitch 400 mm, vulcanised belt joint. Temperature resistance from -10°C to + 90°C
- Transmission group composed of: three-phase motor, worm reduction unit with lubrication for life
- Fixed standard speed ~3 m/min
- Equipped with Start/Stop motor cut-out
- Standard motor supply voltage 400V/50 Hz

ROOK DIMENSIONS

MODEL	A (mm)	B (mm)	α	Hs (mm)
ROOK 3/15	340	1500	45°	900
ROOK 3/20	340	2000	40°	1100
ROOK 3/25	340	2500	35°	1250
ROOK 4/15	440	1500	45°	900
ROOK 4/20	440	2000	40°	1100
ROOK 4/25	440	2500	35°	1250
ROOK 5/20	540	2000	40°	1100
ROOK 5/25	540	2500	35°	1250
ROOK 5/30	540	3000	30°	1350