

Xaloy® Efficient™ Barrier Screw

The Xaloy® Efficient™ barrier screw design was one of the first patented screw designs in the history of plasticating screw technology. Through the years, the design methods and techniques have been refined to the point where it has become the most modifiable barrier design in the Xaloy screw offering. The Xaloy® Efficient™ barrier screw typically delivers up to 20% more output than conventional screw designs, while offering better melt temperature control and homogeneity.




Features and Benefits

What it can do for you

- Increases melting efficiency due to elimination of premature solids bed breakup
- Enhances melt homogeneity from moderate shear created by the barrier flight
- Increases melting rates and throughput resulting from “Efficient™” management of the solids bed geometry
- Improves melt temperature control due to lower, post melt shear stresses

Ready to meet your needs

For a quotation or additional information, contact your Xaloy representative today.

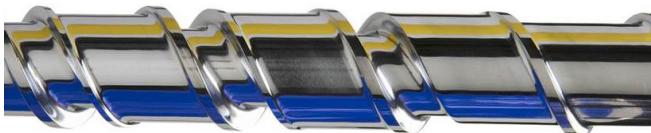

Which Materials?

The Xaloy® Efficient™ barrier screw has proven to deliver benefits in processing:

ABS	FPVC
EVA	HIPS
HDPE	LDPE/LLDPE blends
Ionomer	PC
Nylon	PETG
PET	Polyurethane
PP	

Which Processes?

The Xaloy® Efficient™ barrier screw is available for the following processes:

- Blow Molding
- Sheet
- Cast Film
- Blown Film
- Wire & Cable
- Profile Extrusion
- Reclaim Extrusion
- Pipe

Xaloy LLC
375 Victoria Road
Austintown, OH 44515 USA
+1.330.726.4000 **Phone**

Germany
+49.7132.999.35.0 **Phone**

Thailand
+66.38.717.084 **Phone**

China
+86.21.5785.091.8 **Phone**

www.xaloy.com | info@xaloy.com
© 2021 Xaloy
Printed in USA
3/2021

XALOY
Solutions through Innovation.™