

Xaloy® Fusion™ Barrier Screw

- Increase Production
- Lower Melt Temperature
- Improve Product Quality
- Lower Drive Motor Load

The proprietary Xaloy® Fusion™ screw allows you to increase production and improve product quality in many process applications. Its design is the combination of proven barrier screw technology and a low shear metering section that provides chaotic mixing, reduced melt temperatures and improved throughputs.

Which materials?

The Xaloy® Fusion™ screw has already proven to deliver benefits in processing:

- | | |
|-------|------|
| HDPE | LDPE |
| LLDPE | MDPE |
| PET | PLA |
| PP | |

Which processes?

The Xaloy® Fusion™ screw is available for the following processes:


- Blown Film
- Sheet Extrusion
- Blow Molding
- Profile
- Pipe

For other process applications, consult us for a screw design recommendation.

How it works; Using our proven barrier technology


- Separation of melted polymer from unmelted resin protects the melt from additional shear
- Recombination of melt streams for homogenization in a short metering section
- Final melting is completed by means of second barrier section designed for multi-cycle chaotic mixing

Diameters available: 1.5" to 10"
(3.81 cm to 25.4 cm)

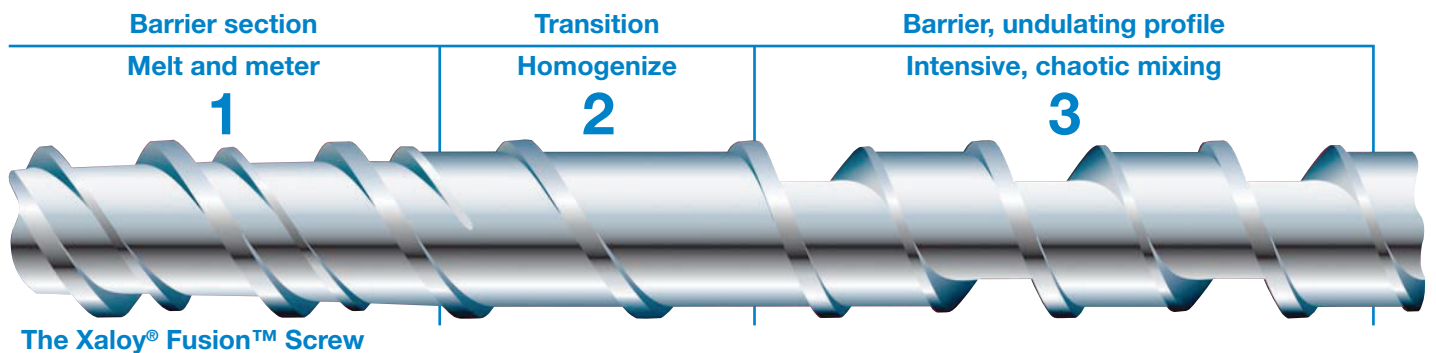

3.5" x 24:1 rates and melt temperatures at 100 and 125 RPM at various headpressures while processing 65% virgin / 35% regrind of a .35 MI HDPE

Note: Suggested Barrel Temperature Profile: Z1=350F, Z2=420F, Z3=400F, Z4=380F, Z5=360F

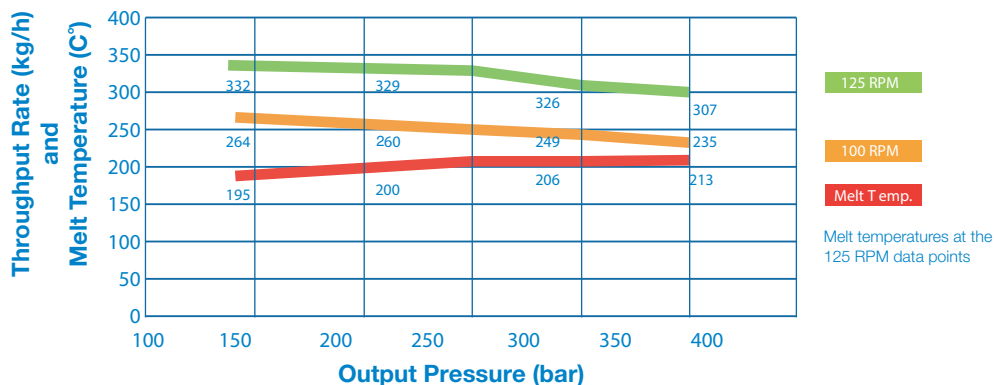


Xaloy® Fusion™ Barrier Screw

Power Efficiency Performance Benefits

Our worldwide presence includes sales and service offices located in the United States, Europe, Thailand, Japan, China and India and a global network of agents geographically positioned to serve customers throughout the world.

Output and Power Efficiency on 3.5" (88.9mm) x 24:1 L/D

(90% LDPE and 10% LLDPE)

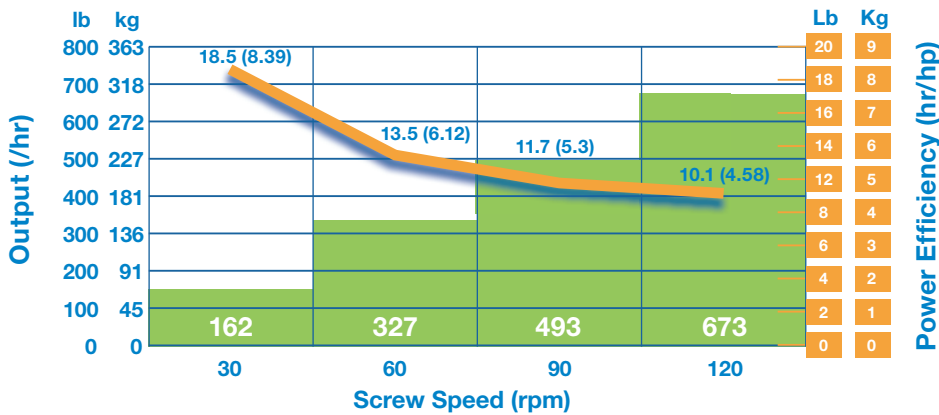


RATE

Typically, .5 to 1.0 MI LD/LLDPE blends require 7 to 8 lb/hr/hp to process effectively.

LB/HR/HP

The Xaloy® Fusion™ Screw was able to process slightly more than 10 lb/hr/hp due to the efficient use of available HP.

Power Efficiency Comparison

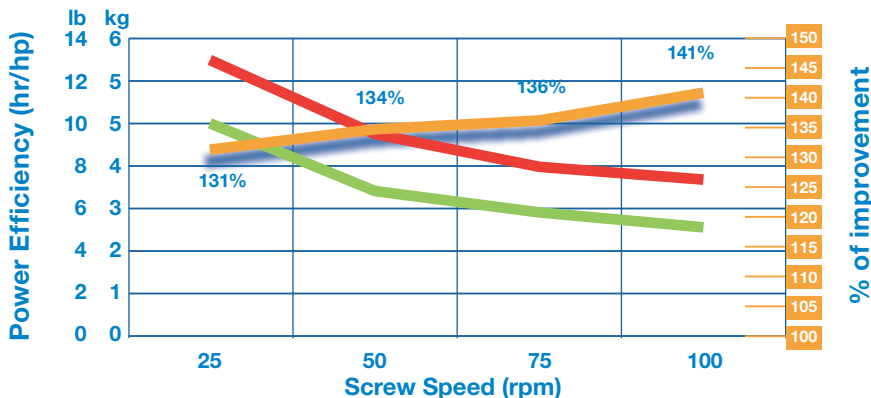

Xaloy® Fusion™ Screw

The Xaloy® Fusion™ Screw also features the added benefit of energy cost savings through more efficient use of available horsepower.

Barrier w/UCC


Resulting Overall Benefits

- More lbs/hr/hp
- Controllable melt temperatures
- Reduced energy costs

% of improvement

Temperature Profile

(for processing a .35MI HDPE)

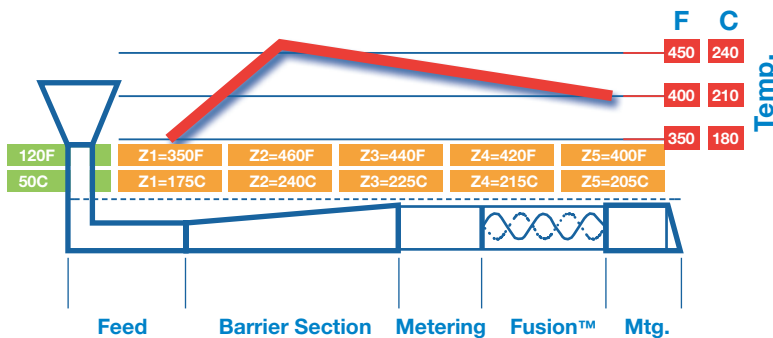

Xaloy recommends that a "hump" type barrel zone temperature profile be used to optimize the performance of the Xaloy® Fusion™ Screw. Make sure that you request the best temperature profile from your Xaloy representative for your resin and process.

Note: This profile typically will produce a 410-420 (210-215°C) melt against a 3500 psi head pressure.

Xaloy LLC
375 Victoria Road
Austintown, OH 44515 USA
+1.330.726.4000 Phone

Germany
+49.7132.999.35.0 Phone

Thailand
+66.38.717.084 Phone

China
+86.21.5785.091.8 Phone

www.xaloy.com | info@xaloy.com
© 2021 Xaloy
Printed in USA
3/2021

XALOY
Solutions through Innovation.™